



Polyisocyanurate Insulation Sheathing



 **HCFC-free**

Enerfoil® by IKO is a non-structural rigid polyisocyanurate insulation sheathing with a foil facer laminated on the top and bottom side.

Manufactured at IKO's state-of-the-art ISO 9001-2008 registered facilities, **Enerfoil** is a sheathing that:

- **Provides high thermal resistance of R6.2 per inch** (RSI 1.08 per 25 mm) for improved energy efficient performance of walls.
- **Helps decrease the cost of construction.** Designers can reduce the overall footprint of their buildings, as a smaller thickness of **Enerfoil** achieves the same R-value (RSI) of other types of insulation.
- **Environmentally friendly.** No ozone-depleting HCFC's are used in the manufacture of **Enerfoil**, making it an ideal "Green" product. **Enerfoil**'s Energy Star® certification means that it clearly contributes to reducing energy consumption.
- **User-friendly.** Laminated facers on both sides of the sheathing provide moderate abuse-resistance on the jobsite. **Enerfoil** is lightweight & easy to cut, thus reducing labor costs on site. Stud indicators improve accuracy of installation.
- **Provides versatility.** Foil facings provide the long-term moisture resistance necessary for cavity wall applications. **Enerfoil**'s facings are also compatible with solvent-based materials, which can attack and compromise the performance of other thermoplastic insulations.
- **Has a uniform thickness** for consistently maintaining air space requirements in cavity wall applications.
- **Available in 4' x 8' boards** with the following thicknesses: 1/2" (12 mm), 5/8" (16 mm), 3/4" (19 mm), 1" (25 mm), 1-1/2" (38 mm), 2" (50 mm), 2-1/2" (63 mm), 3" (75 mm), 3.5" (89 mm), and 4" (100 mm). Available in 4' x 9' boards with the following thicknesses: 3/4" (19 mm), 1" (25 mm) and 1-1/2" (38 mm).
- **Can be pre-cut** at our factory to the size you need with IKO AccuCut.

Applications

Consult your local Building Code for requirements pertaining to air barriers, vapour retarders, joint treatment and strapping. No special personal protective equipment is required but good work practices dictate the use of gloves and safety glasses. **Note:** In order to reduce exposure to the elements, it is important to apply the exterior veneer over **Enerfoil** as soon as practical, following its installation. If it will be left exposed for an extended period of time, keep a protective covering over the sheathing.



Frame Construction Siding

For wood framing, corner bracing is recommended at corners and around large openings. The framing must be structurally reinforced with either cross bracing or structural sheathing. **Enerfoil** is fastened to the studs using washered nails. Steel stud walls have **Enerfoil** fastened to the studs using mechanical fasteners & washers. Please refer to "IKO Report: Insulation Fastener Guide" for further information.

Frame Construction Brick Veneer

For wood framing **Enerfoil** is fastened to the studs using washered nails. Steel stud walls have **Enerfoil** fastened to the studs using mechanical fasteners & washers. Please refer to "IKO Report: Insulation Fastener Guide" for further information.

Note: All Illustrations show wood stud framing and gypsum sheathing. Please note that all illustrations are not to serve as building specifications. For exact construction instructions, please consult with a local design official to ensure compliance with local building code requirements.

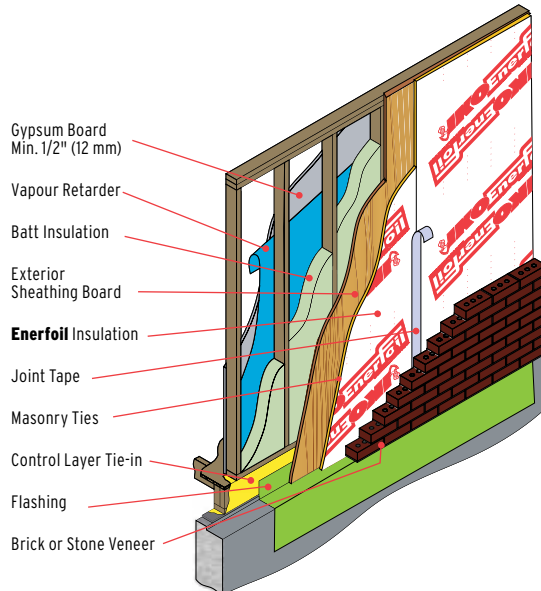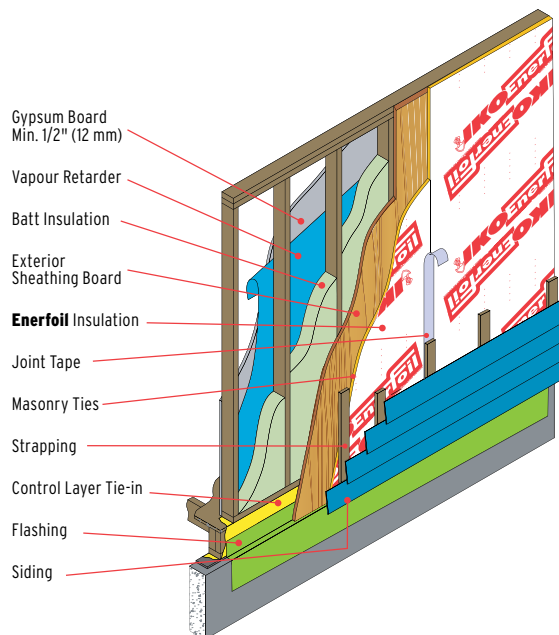


†USA ONLY

Note: Proper structural requirements can be met by bracing or exterior sheathing.

Applications Cont'd



Block Wall Construction

Enerfoil is attached against block wall with air/vapour barrier. Boards are cut to friction fit between Building Code approved masonry ties. Please refer to "IKO Report: Insulation Fastener Guide" for further information.

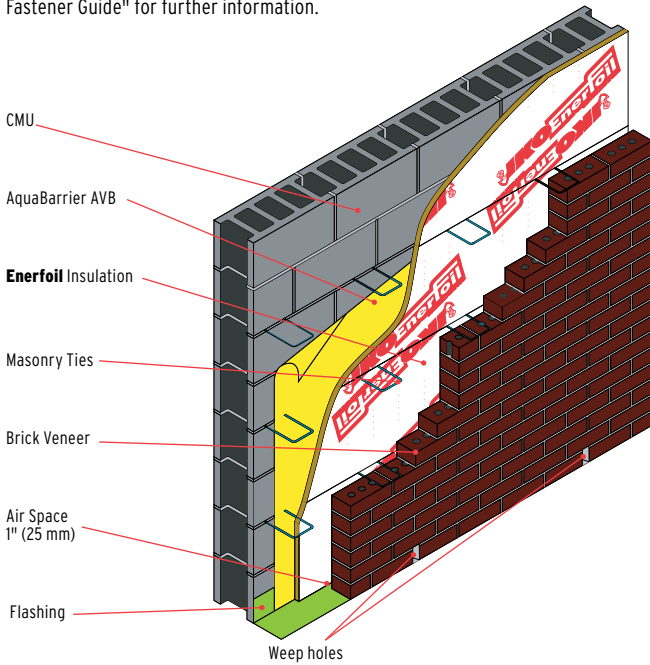

Retrofit Application

Corrective action should be taken where evidence of moisture-related problems exist. This may include the replacement or repair of framing members, increased ventilation or installation of a vapour retarder. Framing must be structurally reinforced with either cross bracing or structural sheathing. Install **Enerfoil** and butt all edges. Secure boards with washered fasteners. Install new siding according to manufacturer's instructions.

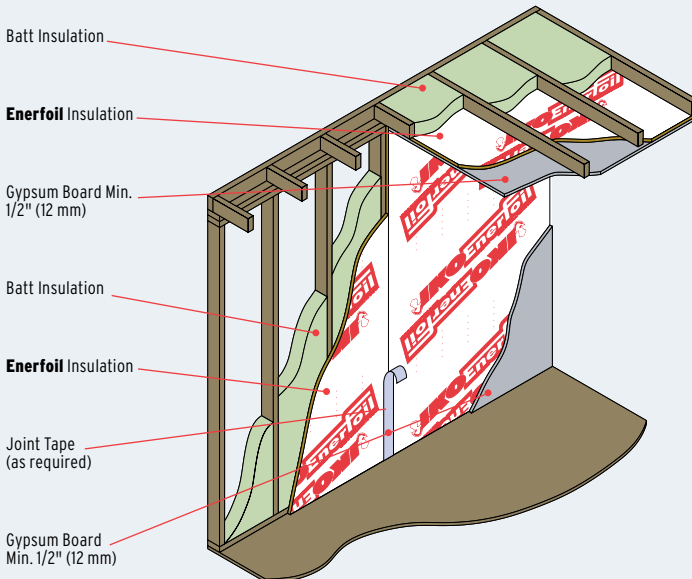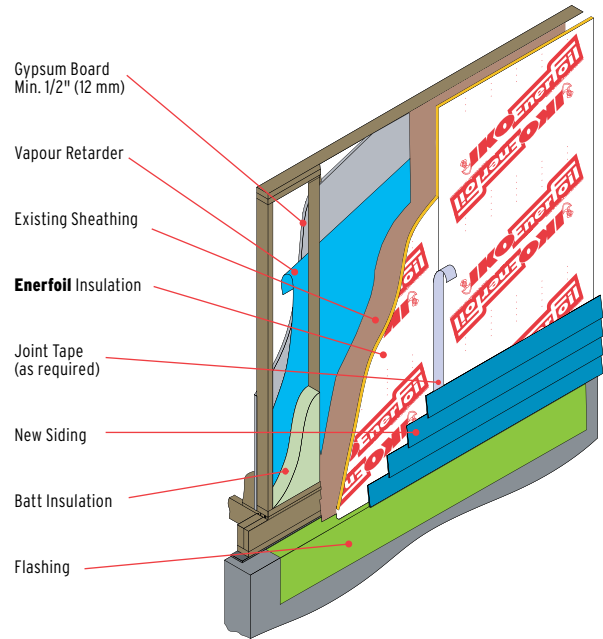

Interior Ceiling & Wall Applications

When used in interior ceiling and wall applications, **Enerfoil** must be protected from the building interior by a minimum 1/2" (12 mm) gypsum board. The use of an interior vapour retarder may not be required if the seams are taped. Consult your local Building Code. For walls, install **Enerfoil** with edges in direct contact with the framing members. Install using washered fasteners. Please refer to "IKO Report: Insulation Fastener Guide" for further information.

Note: All illustrations show steel stud framing and gypsum sheathing. Please note that all illustrations are not to serve as building specifications. For exact construction instructions, please consult with a local design official to ensure compliance with local building code requirements.

Storage

- It is recommended that **Enerfoil** be stored indoors.
- When outdoor storage of insulation is unavoidable, the insulation shall be stacked on pallets a minimum of two inches 2" (50 mm) above ground level and covered with a waterproof tarp. The insulation manufacturer's packaging is not considered waterproof and shall be slit, as recommended by the manufacturer, to reduce condensation inside the packaging.

Note: **Enerfoil** should not be used below grade where it is subject to water infiltration.



Typical Physical Properties


Characteristic	Units	Typical Value	Specification	Test Method	Standard Limits
Length Tolerance	in. (mm)	± 0.16 (+ 4)	CAN/ULC-S704	ASTM C303	+ 0.25 (+ 6) ± 0.16 (- 4)
Width Tolerance	in. (mm)	± 0.08 (+ 2)	CAN/ULC-S704	ASTM C303	+ 0.16 (+ 4) ± 0.08 (- 2)
Dimensional Stability (MD/XD) At 70°C, 97% R.H.	%	< 2	CAN/ULC-S704	ASTM D2126	MAX: + 2
Water Vapour Permeance	ng/Pa·s·m ²	< 15	CAN/ULC-S704	ASTM E96	=/ < 15
Water Absorption	% by Vol.	< 1.0	CAN/ULC-S704	ASTM D2842	MAX: 3.5
Compressive Strength	kPa (psi)	124 (18)	CAN/ULC-S704	ASTM D1621	MIN: 110 (16)
Thermal Resistance Value* Thickness:					
0.5 in. (12 mm)		3.1 (0.54)			
0.625 in. (16 mm)		3.9 (0.68)			
0.75 in. (19 mm)		4.5 (0.81)			
1.0 in. (25 mm)		6.2 (1.08)			
1.5 in. (38 mm)		9.3 (1.62)			
2.0 in. (50 mm)		12.4 (2.16)			
2.5 in. (63 mm)		15.5 (2.70)			
3.0 in. (75 mm)		18.6 (3.24)			
3.5 in. (89 mm)		21.7 (3.78)			
4.0 in. (100 mm)		24.8 (4.32)			
	Btu·hr·ft ² ·°F (RSI)		CAN/ULC-S704 ASTM C518	CAN/ULC-S770	-
Service Temperature	°F (°C)	± 40 to 212 (± 40 to 100)	-	-	-
Air Permeance	L/S·m ²	< 0.02	NBCC 2010 Division B 5.4.1.2	ASTM E2178-13	0.02
Flame Spread Index	-	< 75	-	ASTM E84	-
Smoke Density Index	-	< 450	-	-	-
Flame Spread Index (Canada)	-	< 500	-	-	-
Smoke Density Index (Canada)	-	< 55	-	S102	-

*Stated thermal resistance values are based upon conditioning requirements and test methodology found in ULC S-704 and ASTM C518 for foil-faced polyisocyanurate insulation. As a conservative estimate for long-term thermal resistance design value, 5.6 (0.99) per inch thickness is typically used. Since R-value claims among various polyisocyanurate brands may vary, it is best to consult independently verified test data such as that found in Canadian Construction Materials Centre (CCMC) Evaluation reports. Please see IKO's CCMC Evaluation Report #13188-L (as well as CCMC Report #'s 12422-R and 13104-L) for more information.

Codes & Compliances

ASTM 1289	Type 1, Class 1
CAN/ULC S704-03	Type 1, Class 1
ASTM E84	Flame Spread Index < 75 Smoke Density Index < 450
S102	Flame Spread Index (Canada) < 500 Smoke Density Index (Canada) < 55
CCMC#	13188-L
ASTM 2357[†]	< 0.2 L/Sm ²
CAN/ULC S724-11[†]	CLASS A1

[†] When joints & penetrations detailed appropriately



**ENERGY STAR
HOME SEALING**

EPA recommends sealing the "envelope" that surrounds your living space:

- the ceiling
- outer walls
- windows
- floors

ENERGY STAR is a program of the U.S. Environmental Protection Agency and the U.S. Department of Energy.

www.energystar.gov

To save on your heating and cooling bill and increase the comfort of your home:

- Add insulation
- Seal air leaks
- Choose ENERGY STAR qualified windows when replacing windows



†USA ONLY



Thank you for considering IKO Premium Insulation products. For additional information on IKO's full line of superior Building Envelope, Roofing and Waterproofing products please call: 1-855-IKO-ROOF (1-855-456-7663) or visit our web site at: www.iko.com

Member of:



ISO-9001-2008
Registered Company



Note: The information in this literature is subject to change without notice. All values shown are approximate. IKO assumes no responsibility for errors that may appear in this literature.

†USA ONLY